


COMMERCIAL LINE CEILING / FLOOR DC INVERTER

Split system air conditioners



SCOP =
A+++

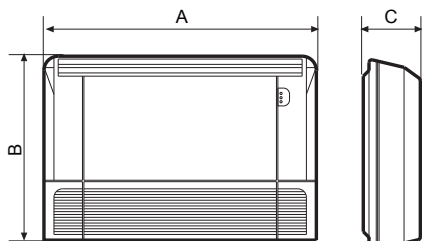

| | A | B | C | |
|----------------------------|------|-----|-----|------|
| | mm | mm | mm | kg |
| CEILING/FLOOR INVERTER 20 | 1068 | 675 | 235 | 28 |
| CEILING/FLOOR INVERTER 25 | 1068 | 675 | 235 | 28 |
| CEILING/FLOOR INVERTER 38M | 1650 | 675 | 235 | 41,5 |

| | A | B | C | |
|----------------------------|------|-----|-----|------|
| | mm | mm | mm | kg |
| CEILING/FLOOR INVERTER 38T | 1650 | 675 | 235 | 41,5 |
| CEILING/FLOOR INVERTER 50 | 1650 | 675 | 235 | 41,7 |
| CEILING/FLOOR INVERTER 60 | 1650 | 675 | 235 | 42,3 |

| MODEL | COOLING POWER kW | THERMAL POWER kW | € |
|--|---------------------|---------------------|----------|
| CEILING/FLOOR 20 DC INVERTER U.I. | 5,27 (2,71÷5,86) | 5,56 (2,42÷6,30) | 1.135,00 |
| OUTDOOR UNIT 20 INVERTER U.E. | | | 1.520,00 |
| CEILING/FLOOR 25 DC INVERTER U.I. | 6,80 (3,22÷7,77) | 7,61 (2,72÷8,29) | 1.163,00 |
| OUTDOOR UNIT 25 DC INVERTER U.E. | | | 1.930,00 |
| CEILING/FLOOR 38M DC INVERTER U.I. | 10,10 (2,73÷11,43) | 11,72 (2,78÷12,78) | 1.532,00 |
| OUTDOOR UNIT 38M FASE DC INVERTER U.E. | | | 3.249,00 |
| CEILING/FLOOR 38T DC INVERTER U.I. | | | 1.532,00 |
| OUTDOOR UNIT 38T FASE DC INVERTER U.E. | | | 3.302,00 |
| CEILING/FLOOR 50 DC INVERTER U.I. | 11,88 (3,52÷15,24) | 13,51 (4,10÷17,0) | 1.794,00 |
| OUTDOOR UNIT 50 DC INVERTER U.E. | | | 3.876,00 |
| CEILING/FLOOR 60 DC INVERTER U.I. | 15,83 (4,10÷16,71) | 18,17 (4,40÷19,64) | 1.932,00 |
| OUTDOOR UNIT 60 DC INVERTER U.E. | | | 4.374,00 |

| TECHNICAL DATA | UM | CEIL/FLOOR 20 | CEIL/FLOOR 25 | CEIL/FLOOR 38M | CEIL/FLOOR 38T | CEIL/FLOOR 50 | CEIL/FLOOR 60 |
|---------------------|-------------------|------------------|------------------|--------------------|--------------------|--------------------|--------------------|
| Cooling power | kW | 5,27 (2,71÷5,86) | 6,80 (3,22÷7,77) | 10,10 (3,73÷11,43) | 10,10 (3,73÷11,43) | 11,88 (3,52÷15,24) | 15,83 (4,10÷16,71) |
| Absorbed power | kW | 1,45 | 2,06 | 3,05 | 3,10 | 3,60 | 5,65 |
| Current consumption | A | 6,0 | 10,54 | 17,0 | 6,30 | 8,80 | 9,70 |
| S.E.E.R. | | 6,2 A++ | 6,1 A++ | 6,2 A++ | 6,2 A++ | 6,1 A++ | 6,1 A++ |
| Thermal power | kW | 5,56 (2,42÷6,30) | 7,61 (2,72÷8,29) | 11,71 (2,78÷12,78) | 11,71 (2,78÷12,78) | 13,51 (4,10÷17,00) | 18,17 (4,40÷19,64) |
| Absorbed power | kW | 1,50 | 2,05 | 3,08 | 3,08 | 3,59 | 6,05 |
| Current consumption | A | 6,6 | 9,50 | 15,00 | 5,40 | 8,90 | 10,50 |
| S.C.O.P. Mid-range | | 4,0 A+ | 4,0 A+ | 4,0 A+ | 4,0 A+ | 4,0 A+ | 4,0 A+ |
| S.C.O.P. Warm-range | | 5,1 A+++ | 5,1 A+++ | 5,1 A+++ | 5,1 A+++ | 5,1 A+++ | 5,1 A+++ |
| Power supply | | 230V/1/50Hz | 230V/1/50Hz | 230V/1/50Hz | 380V/3+N/50Hz | 380V/3+N/50Hz | 380V/3+N/50Hz |
| Air flow | m ³ /h | 958/839/723 | 1192/1023/853 | 1955/1728/1504 | 1955/1728/1504 | 2100/1850/1600 | 2200/1950/1650 |
| Sound level I.U. | dB(A) | 44/41/37 | 49/46/43/32 | 50/48,5/44/37 | 50/48,5/44/37 | 53/50/45/36 | 54/50,5/46,5/38 |
| Length Piping | m | ≤ 30 | ≤ 50 | ≤ 75 | ≤ 75 | ≤ 75 | ≤ 75 |
| Dislevel units | m | ≤ 20 | ≤ 25 | ≤ 30 | ≤ 30 | ≤ 30 | ≤ 30 |
| Gas connections | | 1/2" | 5/8" | 5/8" | 5/8" | 5/8" | 5/8" |
| Liquid connections | | 1/4" | 3/8" | 3/8" | 3/8" | 3/8" | 3/8" |

Cooling test conditions: int. 27 ° C d.b. / 19,5 ° C wb. - Ext. 35 ° C d.b. / 24 ° C wb.

Heating test conditions: int. 20 ° C d.b. - Ext. 7 ° C d.b. / 6 ° C wb.

COMMERCIAL LINE - DUCTABLE ACCESSORIES DC INVERTER

Split system air conditioners

€



Multifunction wired remote control with follow me function, internal receiver and addressing

cod. 63000071

168,00



Wi-Fi control via smartphone or pad for R32 commercial series indoor units. App suitable for Android and iOS systems with all basic functions. Senior function, weekly timer, personalized sleep curve and self-control.

cod. 63000012

164,00



TWIN system kit, conversion from commercial range into dual split air conditioner

cod. 63000072

194,00



FLEX PIPE IN INSULATED PVC for ducts of 10 m - Ø 200

cod. 37900001

208,00



BRAGA to Y

cod. 65500020

50,00



DELIVERY PORT 40x20 cm with adjustable blades complete with damper

cod. 37900070

98,00



CONNECTION PLENUM Ø 200 40x20 cm between flex tube and delivery nozzle

cod. 37900019

146,00



ANCHOR BRACKETS FOR OUTDOOR UNITS for mod. 9 - 12 complete with anti-vibration kit for mod. 18 - 20 - 25 - 38 - 50 - 60 complete with anti-vibration kit

cod. 37081060


50,00

cod. 37081061

90,00



CIRCULAR DIFFUSERS Ø 200 with millimetrically adjustable cones and butterfly calibration damper




cod. 37900027

122,00



PLENUM CONNECTION Ø 200 between flexible tube and circular diffuser with adjustable cones



cod. 379000031

210,00